

# DIESEL GENERATOR SET

## AIR CHARGE-AIR COOLING

770kVA/50 Hz/Prime (Fuel-Optimized)  
380 - 415V



Optional equipment shown. Standard equipment may vary.

### BENEFITS

- // Industry-leading average load factor
- // Outstanding fuel economy
- // Optimized maintenance intervals
- // Low installation costs
- // Best-in-class reliability and availability
- // Lifting vertically or with diagonal pull
- // Compact design

### SYSTEM RATINGS<sup>①</sup>

Prime	DP00770D5S	DP00770D5S	DP00770D5S
Voltage (L-L)	380V	400V	415V
Phase	3	3	3
PF	0.8	0.8	0.8
Hz	50	50	50
kW	616	616	616
kVA	770	770	770
Amps	1170	1111	1071
Generator model	574RSL7066	574RSL7066	574RSL7066
Temp rise	125 °C/40 °C	125 °C/40 °C	125 °C/40 °C
Connection	6 LEAD HI WYE	6 LEAD HI WYE	6 LEAD HI WYE

① Power available up to 40°C/400 m

## CERTIFICATIONS AND STANDARDS

- // Engine-generator set is designed and manufactured in facilities certified to standards ISO 9001:2008 and ISO 14001:2004
- // Performance Assurance Certification (PAC)
  - Engine-generator set tested according to ISO 8528-5 for transient response
  - Verified product design, quality and performance integrity
  - All engine systems are type and factory tested

- // Power Rating
  - Permissible average power output during 24 hours of operation up to 75%

## STANDARD EQUIPMENT<sup>①</sup>

### // Engine

Air filters  
 Oil pump for draining  
 Full flow oil filters  
 Closed crankcase ventilation  
 Jacket water pump  
 Thermostats  
 Exhaust manifold – dry  
 Belt driven radiator fan  
 Radiator – unit mounted  
 Electric starting motor – 24V  
 Governor – electronic isochronous  
 Base – formed steel  
 SAE flywheel & bell housing  
 Charging alternator  
 Flexible fuel connectors  
 Flexible exhaust connection

### // Generator

NEMA MG1, IEEE and ANSI standards compliance for temperature rise and motor  
 VDE 0530, IEC 60034-1, BS 4999, BS 5000, CSA 22.2-100, AS 1359  
 Sustained short circuit current of up to 250% of the rated current for up to 10 seconds  
 Self-ventilated and drip-proof IP23  
 Superior voltage waveform  
 Digital, volts-per-hertz regulator  
 No load to full load regulation  
 Brushless alternator with brushless pilot exciter  
 4 Pole, rotating field  
 125 °C maximum prime temperature rise  
 Heavy duty shielded ball bearings with a minimum B-10 life of 40,000 hrs  
 Flexible coupling  
 Full amortisseur windings  
 3-phase voltage sensing  
 ±0.25% voltage regulation  
 100% of rated load – one step according to NFPA 110  
 3% maximum harmonic content

<sup>①</sup> Represents standard product only. Consult Factory/MTU Onsite Energy distributor for additional configurations.

## STANDARD FEATURES<sup>①</sup>

- // The engine-generator set complies to G3
- // Engine generator set tested according to ISO 8528-5 for transient response
- // Accepts rated load in one step as per NFPA 110
- // All engine-generator sets are type and factory tested
- // MTU Onsite Energy is a single source supplier
- // Global product support
- // Cooling System (integral set-mounted; engine driven fan)
- // 12V2000 diesel engine (23,88 Liter (1457 cu inch) displacement; 4-stroke)
- // Engine-generator resiliently mounted
- // Complete range of accessories
- // Brushless, rotating field generator (PMG excitation; 250% short circuit capability; 2/3 pitch stator windings)
- // Complete system metering
- // LCD display

## APPLICATION DATA

### // Engine

Manufacturer	MTU
Model	12V2000G65TD
Type	4-Stroke
Arrangement	12-V
Displacement/cylinder: l (cu inch)	1.99 (121)
Bore: mm (inch)	130 (5.1)
Stroke: mm (inch)	150 (5.9)
Compression ratio	16:1
Rated speed rpm	1500
Engine governor	Electronic isochronous
Max power: kWm (bhp)	695 (932)
Speed regulation	±0.25%
Air filter	Dry

### // Lube Oil Capacity

Total oil system: l (gal)	77 (20)
---------------------------	---------

### // Electrical

Electric Volts DC	24
Cold Cranking Amps Under -17.8 °C (0 °F)	1000

### // Fuel System

Fuel supply connection size	M22x1,5 - 60°/Male
Fuel return connection size	M12x1,5 - 60°/Male
Maximum fuel lift: m (ft)	5 (16)
Recommended fuel	see MTU fluids & lubrication spec.
Total fuel flow: l/hr (gal/hr)	480 (127)

### // Fuel Consumption<sup>②</sup>

	gal/hr	l/hr	g/kwh
At 100% of power rating:	44	168	201
At 75% of power rating:	34	127	203
At 50% of power rating:	23	88	210

### // Cooling/Radiator System

Ambient capacity of radiator: °C	40 (optional 50) <sup>③</sup>
Max. restriction of cooling air, intake, and discharge side of rad.: kPa (in. H <sub>2</sub> O)	0,200 (0.8)
Water pump capacity: l/min (gpm)	667 (176)
Heat rejection to coolant: kW (BTUM)	310 (17,629)
Heat rejection to after cooler: kW (BTUM)	135 (7,677)
Heat radiated to ambient: kW (BTUM)	40 (2,275)
Engine coolant capacity: l (gal)	90 (24)
Coolant to cooler temperature: °C (°F)	95 (203)

### // Air Requirements<sup>④</sup>

Aspirating: *m <sup>3</sup> /min (SCFM)	51 (1799)
Air flow required for rad. cooled unit: *m <sup>3</sup> /min	1698 (59905)

### // Exhaust System

Gas temp. (stack): °C (°F)	555 (1031)
Gas volume flow temp: m <sup>3</sup> /min (SCFM)	138 (4869)
Maximum allowable back pressure: kPa	8,5 (34)


① Represents standard product only. Consult Factory/MTU Onsite Energy distributor for additional configurations.

② Values in accordance with ISO 3046-1. Conversion calculated with fuel density of 0.83 g/ml.

③ System ratings at 50°C may differ.

④ Air density = 1.184 kg/m<sup>3</sup> (0.0739 lbm/ft<sup>3</sup>)

## WEIGHTS AND DIMENSIONS

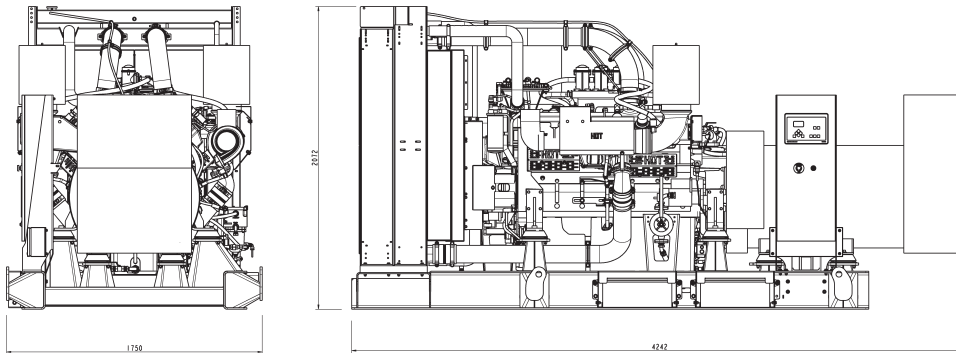

Drawing above for illustration purposes only, based on standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

### System

Open Power Unit (OPU)

### Dimensions (L x W x H)

4242 x 1750 x 2072 mm (167 x 69 x 82 in)

### Weight (dry/less tank)

5477 kg (12,075 lbs)

Weights and dimensions are based on open power units and are estimates only. Consult the factory for accurate weights and dimensions for your specific engine-generator set.

## SOUND DATA

// Consult your local MTU Onsite Energy distributor for sound data.

## EMISSIONS DATA

// Consult your local MTU Onsite Energy distributor for emissions data.

## RATING DEFINITIONS AND CONDITIONS

// Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1, overload power in accordance with ISO-3046-1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings, consult the factory.

// Deration factor:

Altitude: Consult your local MTU Onsite Energy distributor for altitude derations.

Temperature: Consult your local MTU Onsite Energy distributor for temperature derations.

Materials and specifications subject to change without notice.